


Osäfe

MCB | DB | RCCB

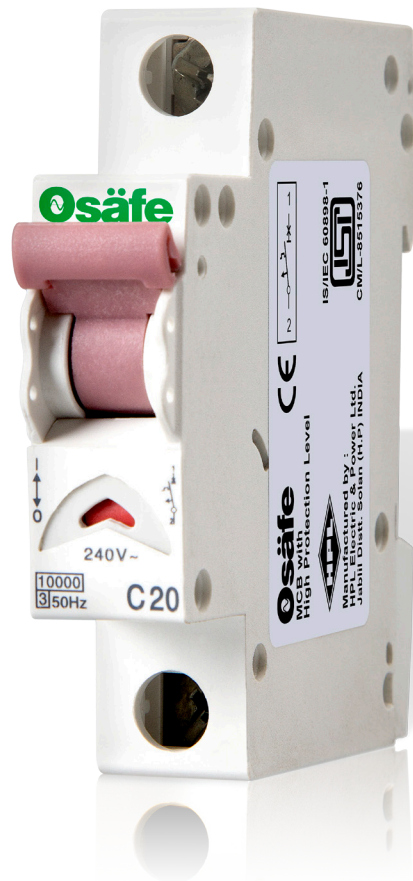

Elegance and
precision engineering
in the same breath.

Range : upto 63Amps.
Available in SP, SPN, DP, TP, TPN & FP version also

Designed by **HPL**




HPL Electric & Power Limited a leading electrical equipment manufacturer with a strong innovative tradition, constantly striving for new level of excellence, developing innovative products and solutions. HPL Product range range which features high quality electronic energy meters, switchgears, lighting, wires & cables, as well as modular switches and accessories. With years of research and development Introducing our latest work of art.

The breathlessly gorgeous range,



Osäfe range the sculpted masterpiece of elegant design and precision engineering for overload safety

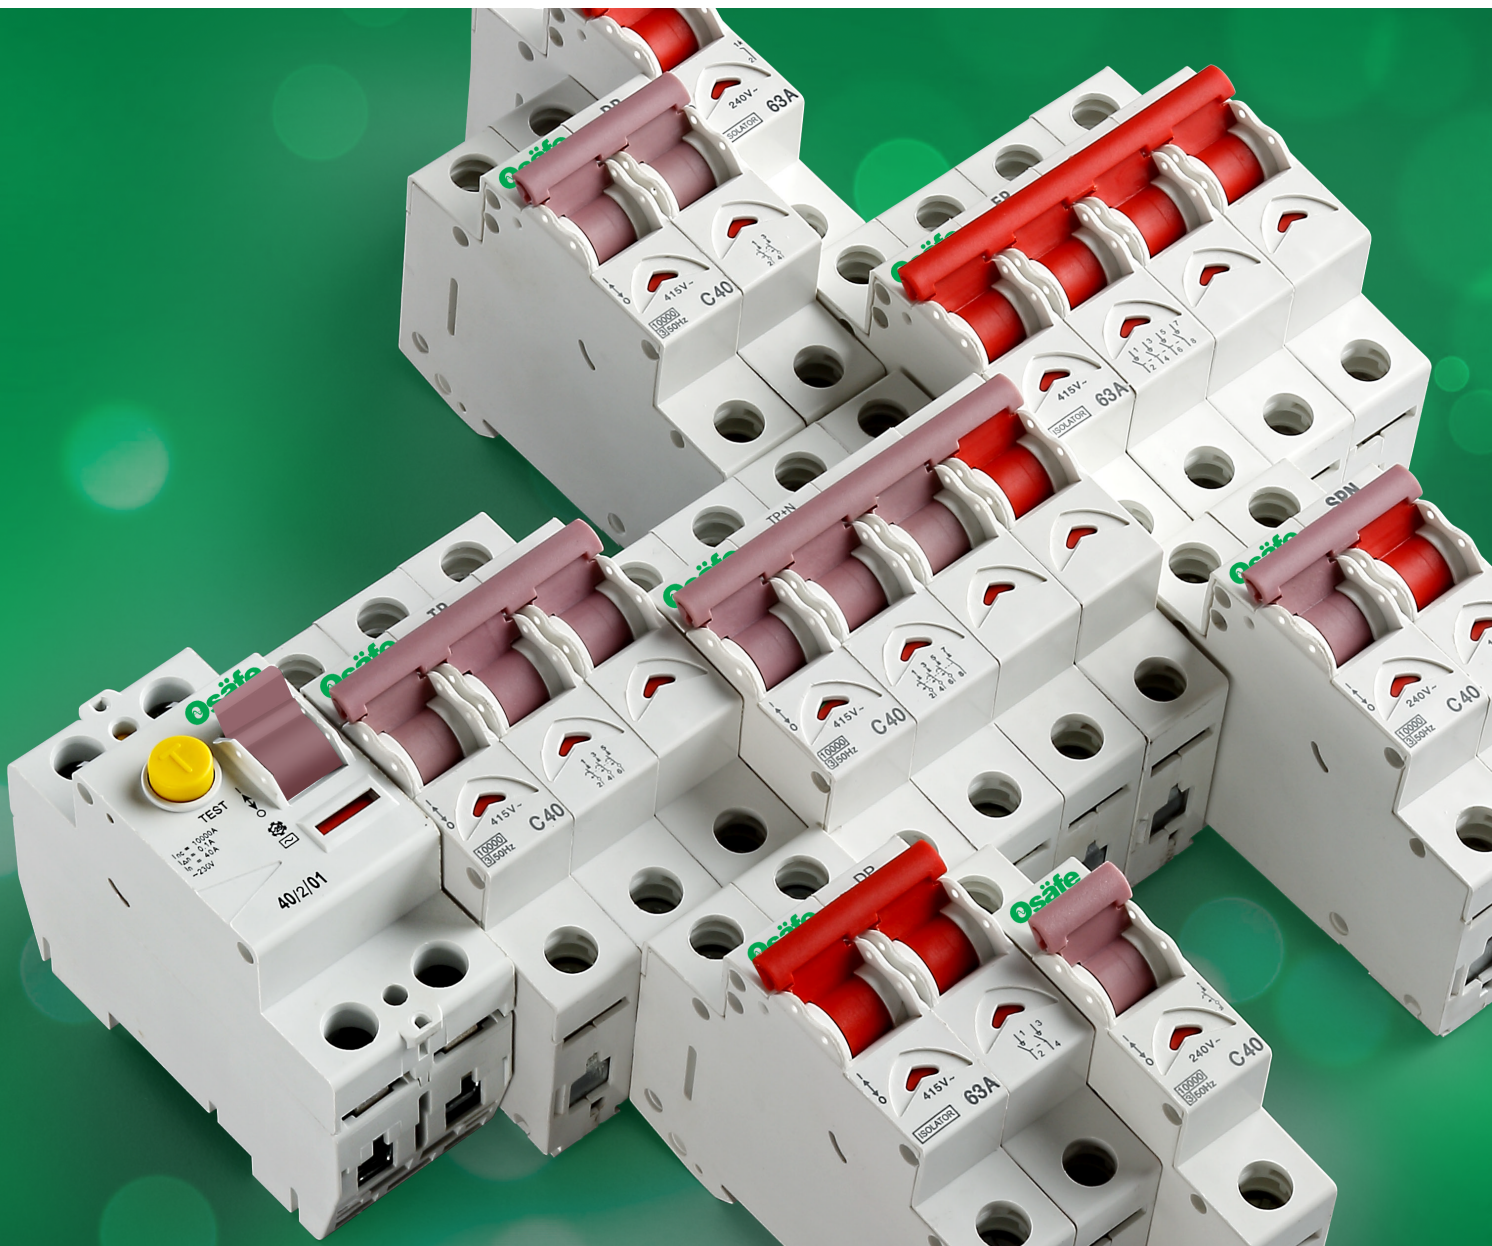

- Protection against Overload & Short Circuit.
- Widest Range 0.5A to 63 A.
- High Breaking Capacity – 10KA
- With IP 20 Protection on Live Parts.
- With contact Position indicator
- Tested as Per IS/IEC 60898-1 : 2002 & 2003
- RCCB available 25A, 40A, 63 Amp, 80Amp in 30mA, 100mA, 300mA leakage tripping current.
- Tested as per IEC 61008-1, IS 12640-1




Miniature Circuit Breakers 10kA


- Contact position indicator red / green
- Secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 63 A
- Tripping characteristics B, C, D
- Rated breaking capacity 10 kA
- Tested as per IS/IEC 60898-1 : 2002 & 2003
- IP20 degree of protection




Connection Diagrams

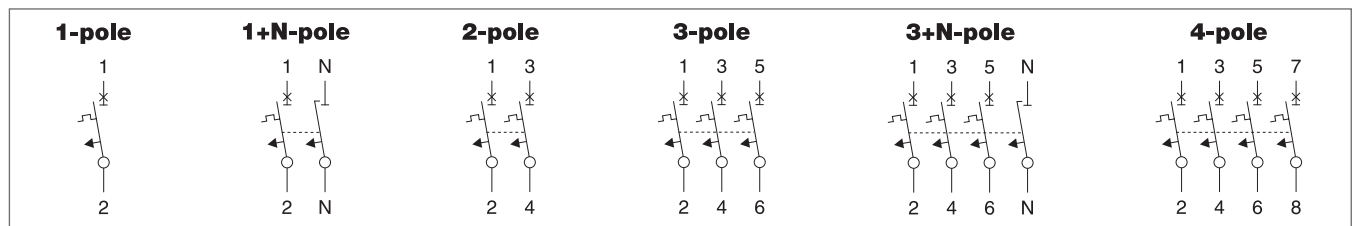


Range

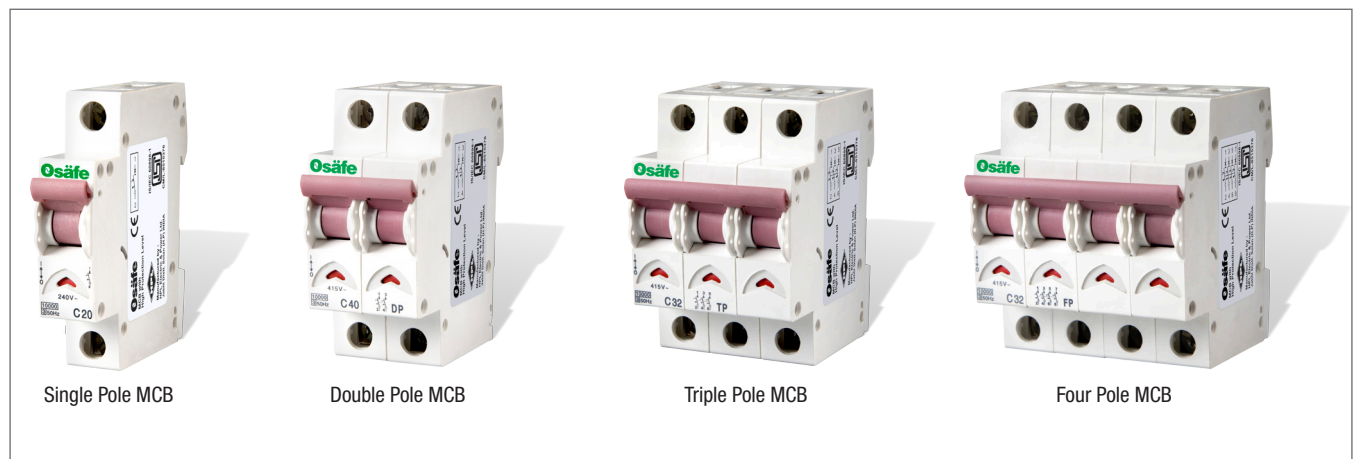



Pad Lock


MCB Dolly can be pad locked in both ON/OFF conditions for safety during maintenance and to limit the electricity consumption.

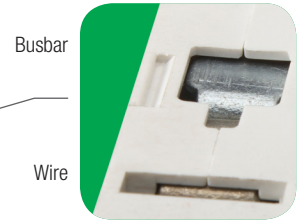

Busbar

Wire


Cable Termination
upto 35mm² Cable



RED - ON

GREEN - OFF

Contact Position Indicator

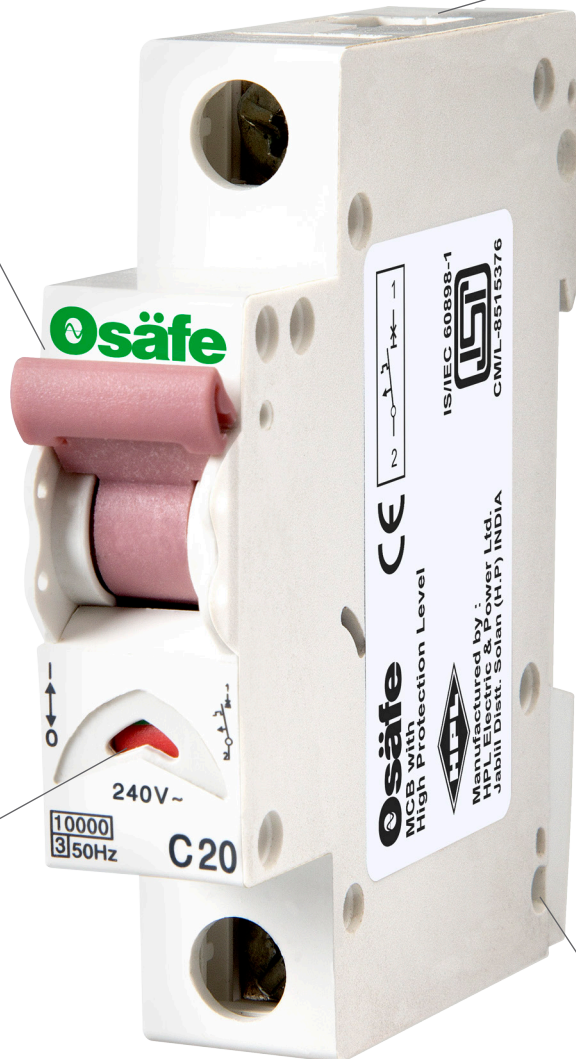

3 Position Mounting Clip

Permits installation and removal without removing busbar.

Design according to

Osäfe : AC IS/IEC 60898-1

Osäfe : DC IS/IEC 60898-2

Breaking capacity

Osäfe : AC 10kA (as per IS/IEC 60898-1)

Characteristics B, C, D

Rated Voltage V_{AC} 240/415V

V_{DC} 24V, 48V, 60V, 110V & 220V (Per pole)



Miniature Circuit Breakers 10kA

- High selectivity between MCB and back-up device due to low let-through energy
- Compatible with standard busbar
- Busbar positioning optionally above or below
- Meets the requirements of insulation co-ordination, distance between contacts > 4 mm, for secure isolation
- Rated breaking capacity 10 kA
Tested as per IS/IEC 60898-1: 2002.
- All range tested as per IEC 60898-1 : 2003.
- Tested at 16kA Icu as per IEC 60947-2, SPC 16A

	ACCESSORIES:	TECHNICAL SPECIFICATIONS	CODE
A	AUXILIARY SWITCH*	6A 1NO+1NC	O AUX61NO+1NC
B	SHUNT TRIP RELEASE*	OPERATIONAL VOLTAGE a) 12-110-AC/12-60 VDC b) 110-415V AC/110-220 VDC	OSTR24 OSTR240
C	UNDER VOLTAGE RELEASE*	a) 240 V/WITHOUT DELAY b) 415 V/WITHOUT DELAY	O UVR240 O UVR415

*Under Development

Technical Data Osäfe


Electrical

Design according to	IS/IEC 60898-1 IS/IEC 60898-2
Current test marks as	printed on the device
Rated voltage	AC: 240/415V DC: 24V, 48V, 60V, 110V & 220V (per pole)
Rated frequency	50 Hz
Rated breaking capacity according to IS/IEC 60898	10 kA
Characteristic	B, C, D
Back-up fuse	max. 125 A gG
Selectivity class	3
Endurance	4000 operating cycles On Load & Off Load
Terminal	Un marked (Line/Load) reversible

Mechanical

Frame size	45 mm
Device height	80 mm
Device width	17.5 mm per pole (1MU)
Mounting	quick fastening with 3 lock-in positions on DIN rail EN 50022
Degree of protection	IP20
Upper and lower terminals	open mouthed/lift terminals
Terminal protection	finger and hand touch safe,
Terminal capacity	1-35 mm ²
(1p+N, 1.5MU)	1-35 mm ² / 1-2x10 mm ² (N)
Terminal fastening torque	2-2.4 Nm
(1p+N, 1.5MU)	2-2.4 Nm / 1,2-1,5 Nm (N)
Busbar thickness	0.8 - 2 mm
Mounting	independent of position

Connection Diagrams

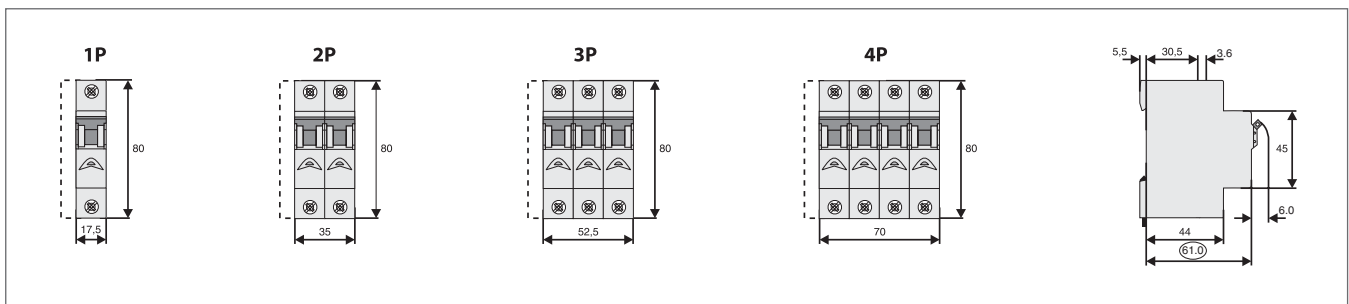

all dimension are in mm.

DC MCB UPTO 63 AMPS

Osäfe MCB specially designed for DC application has been developed by HPL's world class R&D to meet the market's stringent requirements for DC circuits.


AVAILABILITY

DC MCBs are available in SP & DP configuration from 0.5 Amp to 63 Amp in various voltages such as 12V, 24V, 48V, 60V, 110V, & 220V.

FEATURES

- Dual tripping system-overload through precisely calibrated bimetal and short circuit through electromagnetic coil.
- DC MCB incorporates a built in permanent magnet, which directs the arc into the arc quenching chamber.
- Free from nuisance tripping caused by vibrations.
- Time constant < 5ms
- Housing of DC MCB is made up of fire retardant, anti-cracking and non-hygroscopic PBT/Nylon.
- Contacts are made up of silver inlaid copper, which ensure low resistance and longer life of circuit breaker.

Tripping Characteristics (IS/IEC 60898)

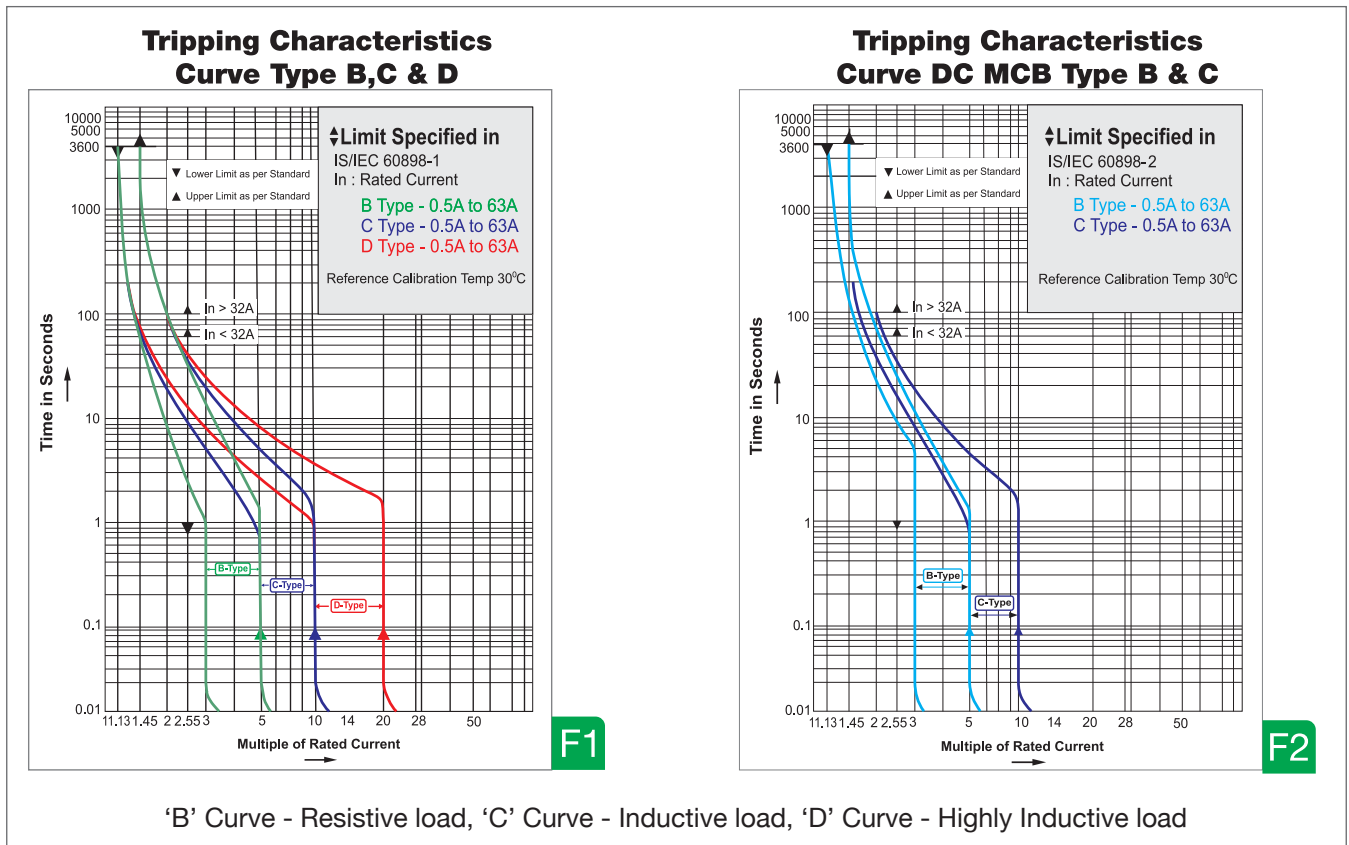







Effect of the Ambient Temperature on Thermal Tripping Behaviour

Adjusted rated current values according to the ambient temperature


I _n [A]	Ambient temperature T [°C]												
	-25	-20	-10	0	10	20	30	35	40	45	50	55	60
0.5	0.61	0.60	0.58	0.56	0.54	0.52	0.50	0.49	0.48	0.47	0.46	0.45	0.44
1	1.2	1.2	1.2	1.1	1.1	1.0	1.0	0.99	0.97	0.95	0.93	0.90	0.89
1.5	1.8	1.8	1.7	1.7	1.6	1.6	1.5	1.5	1.5	1.4	1.4	1.4	1.3
1.6	2.0	1.9	1.9	1.8	1.7	1.7	1.6	1.6	1.5	1.5	1.5	1.4	1.4
2	2.4	2.4	2.3	2.2	2.2	2.1	2.0	2.0	1.9	1.9	1.9	1.8	1.8
2.5	3.1	3.0	2.9	2.8	2.7	2.6	2.5	2.5	2.4	2.4	2.3	2.3	2.2
3	3.7	3.6	3.5	3.4	3.3	3.1	3.0	3.0	2.9	2.8	2.8	2.7	2.7
3.5	4.3	4.2	4.1	3.9	3.8	3.7	3.5	3.4	3.4	3.3	3.2	3.2	3.1
4	4.9	4.8	4.7	4.5	4.3	4.2	4.0	3.9	3.9	3.8	3.7	3.6	3.5
5	6.1	6.0	5.8	5.6	5.4	5.2	5.0	4.9	4.8	4.7	4.6	4.5	4.4
6	7.3	7.2	7.0	6.7	6.5	6.3	6.0	5.9	5.8	5.7	5.6	5.4	5.3
8	9.8	9.6	9.3	9.0	8.7	8.4	8.0	7.9	7.7	7.6	7.4	7.2	7.1
10	12	12	12	11	11	10	10	9.9	9.7	9.5	9.3	9.0	8.9
12	15	14	14	13	13	13	12	12	12	11	11	11	11
13	16	16	15	15	14	14	13	13	13	12	12	12	12
15	18	18	17	17	16	16	15	15	15	14	14	14	13
16	20	19	19	18	17	17	16	16	15	15	15	14	14
20	24	24	23	22	22	21	20	20	19	19	19	18	18
25	31	30	29	28	27	26	25	25	24	24	23	23	22
32	39	38	37	36	35	33	32	32	31	30	30	29	28
40	49	48	47	45	43	42	40	39	39	38	37	36	35
50	61	60	58	56	54	52	50	49	48	47	46	45	44
63	77	76	73	71	68	66	63	62	61	60	58	57	56

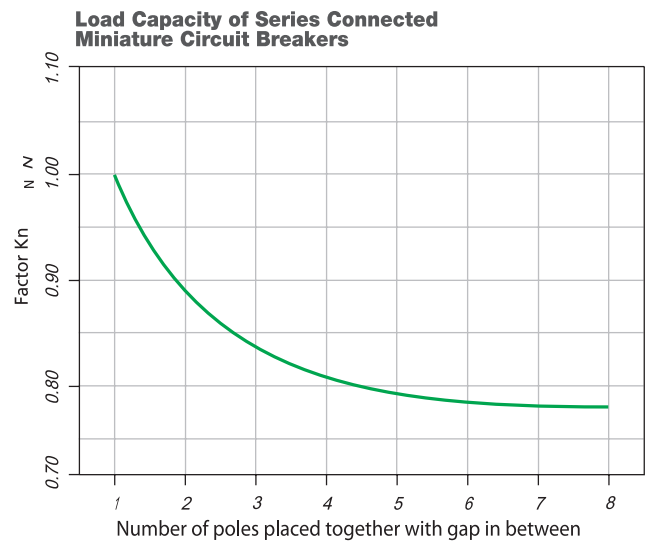

Let-through Energy 10kA

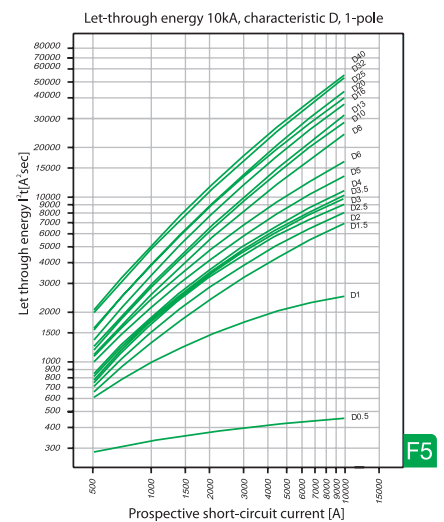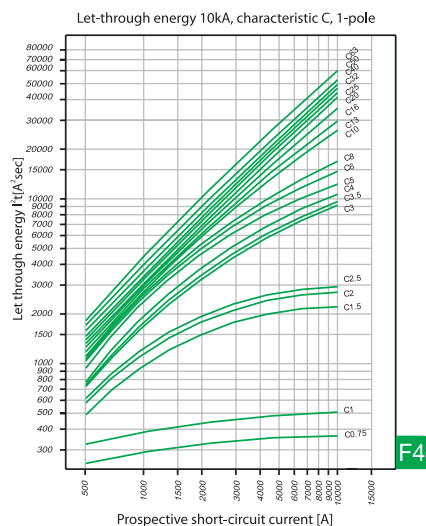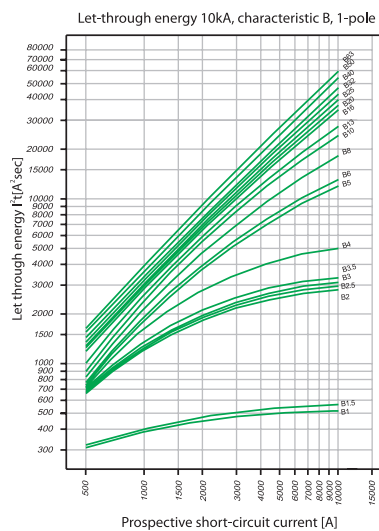


Isolator

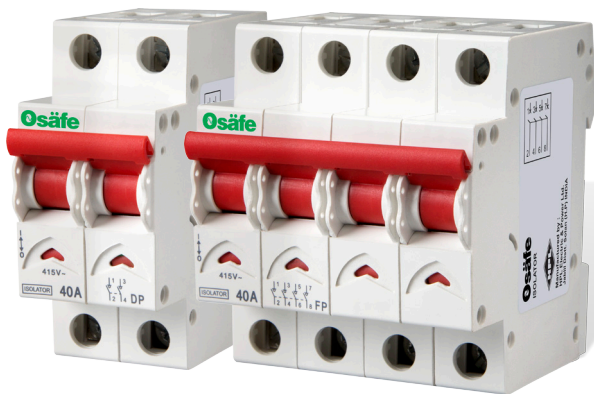


- Available in single break & double break
- Contact position indicator red / green
- Secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents 40A - 125A
- Rated conditional short circuit capacity 10 kA according to IS/IEC 60947-3
- IP20 degree of protection

Connection Diagrams Isolator

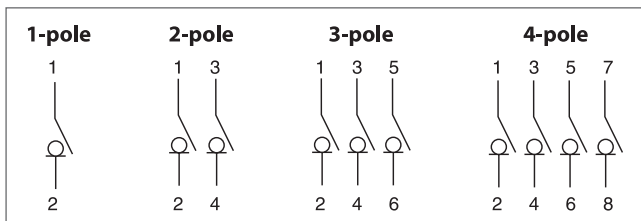

Single Break

Dimensions (mm)

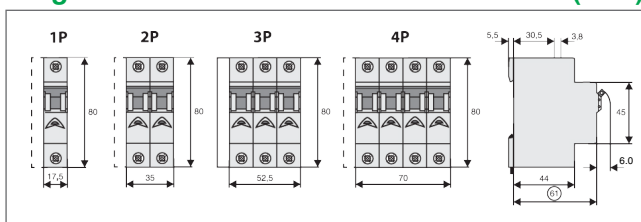

all dimension are in mm.

Mechanical

Frame size	45 mm
Device height	80 mm
Device width	17.5 mm per pole (1MU)
Mounting	quick fastening with 3 lock-in positions on DIN rail EN 50022
Degree of protection	IP20
Upper and lower terminals	open mouthed/lift terminals
Terminal protection	finger and hand touch safe,
Terminal capacity	1-35 mm ²
Terminal fastening torque	2-2.4 Nm
Busbar thickness	0.8 - 2 mm
Mounting	independent of position


Electrical

Reference Standard	IS/IEC 60947-3
No. of Poles	1P,2P,3P,4P
Utilization Category	AC 22B, AC 23B
Rated Current (In)	40A, 63A, 80A, 100A, 125A
Rated Voltage (Ue)	240/415 V ~
Rated Frequency (f)	50 Hz
Rated Insulation Voltage (Ui)	660V
Rated Impulse Voltage (Uimp)	6kV
Dielectric Strength	2.5kV
Electrical/Mechanical Endurance (no. of operations) minimum	Electrical : 1500 Mechanical : 8500
Humidity	95% RH
Terminal Capacity (max)	35mm ²
Tightening Torque	2 N-m
Vibration	3 g
Shock Resistance	40mm free fall
Protection Class	IP20
Positive Contact Indication	Yes, Through Flag Indication (Red-ON, Green-OFF)
Mounting	Clip on DIN Rail (35mm x 7.5mm)
Installation Position	Vertical/Horizontal
Case & Cover	Moulded, flame retardant PBT/Nylon
Busbar Connections Top Side	Pin/Fork Type
Busbar Connections Bottom Side	Pin/Fork Type




MCB Changeover Switch

- Conforms to IS/IEC : 60947-3
- Choice of Two Pole & Four Pole versions
- Front operation with three stable positions I-0-II
- Off at middle position
- DIN Rail Mounting facility

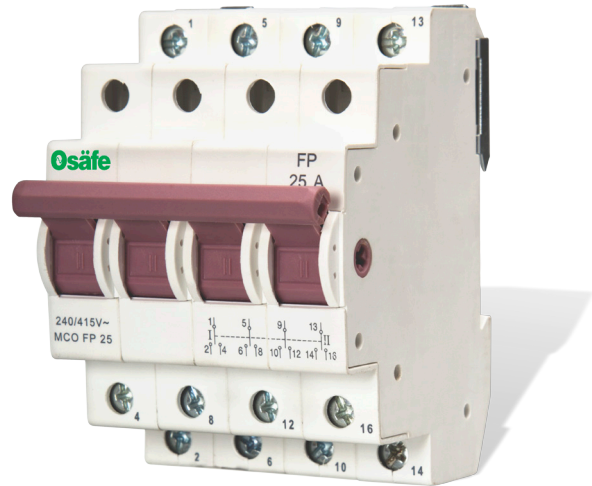


Connection Diagrams / Technical Marking

Two Pole



- | | | |
|------|-------------------------------------|-------|
| "I" | Incoming Terminals (Main Supply) | 2 & 6 |
| "II" | Incoming Terminals (Standby Supply) | 4 & 8 |
| | Outgoing Terminals (to load) | 1 & 5 |
- Mid position of knob is 'OFF' position

Four Pole

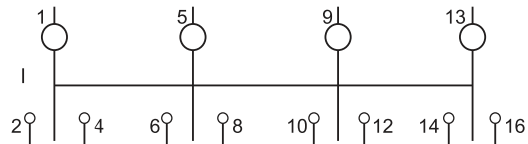


- | | | |
|------|-------------------------------------|---------------|
| "I" | Incoming Terminals (Main Supply) | 2, 6, 10 & 14 |
| "II" | Incoming Terminals (Standby Supply) | 4, 8, 12 & 16 |
| | Outgoing Terminals (to load) | 1, 5, 9 & 13 |
- Mid position of knob is 'OFF' position

Range



Double Pole MCB

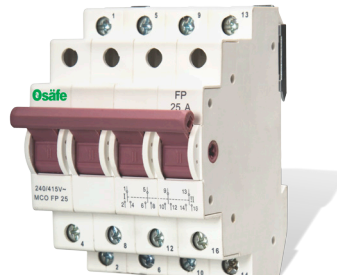


Four Pole MCB



Standard Conformity	:	IS/IEC 60947 - 3
No. of Poles (Execution)	:	2 Pole, 4 Pole
Rated Current (In)	A	: 25A, 40A, 63A
Rated Voltage (Ue)	V	: 240 AC/415 AC
Rated Frequency	Hz	: 50
Rated Insulation Voltage	V	: 660
Dielectric Strength	kV	: 2.5
Rated Impulse Voltage	kV	: 4
Utilization Category	:	AC 22 A
Ambient Temp.	°C	: -5 to +55
Mechanical Life	:	10000 operations
Electrical Life	:	1500 operations
Mounting	:	Standard (35 x 7.5) mm - DIN Rail
Mounting Position	:	Vertical / Horizontal
Terminal Capacity	mm ²	: 35
Weight - Double Pole	gms	: 134
Four Pole	gms	: 268

Dimension (in mm)

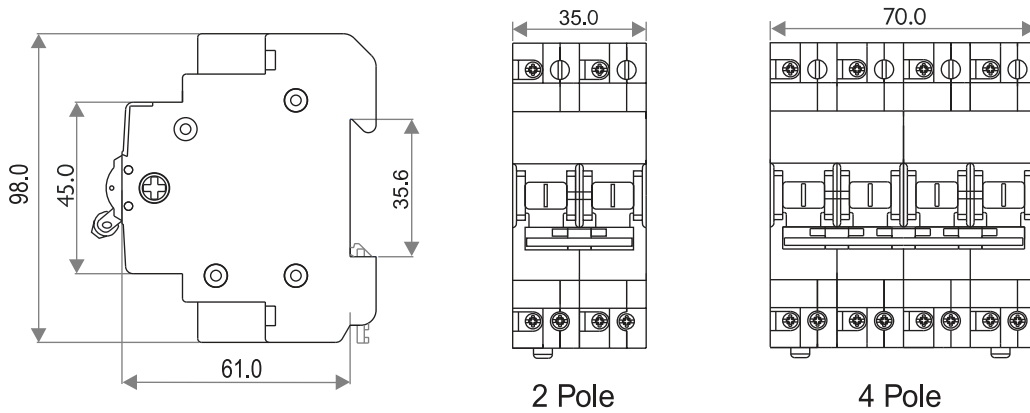




Residual Current Circuit Breaker

- Tested as per IEC 61008-1, IS 12640-1,
- Dedicated Earth leakage protection.
- Short Circuit Withstand capacity 10 kA
- In Double Pole & Four Pole version
- Protection against Electrocution, Short Circuit & Electrical Fire.
- Range: 25 Amp, 40 Amp, 63Amp & 80 Amp in 30mA, 100mA & 300mA
- Consistent performance, Compact & Space Saving
- Wide variety of nominal current.
- Automatic re-setting possible.




Connection Diagrams

2 Pole

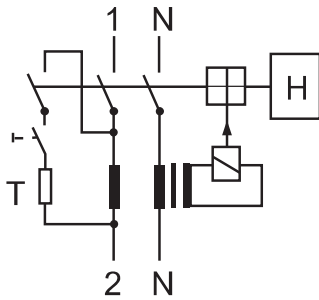

4 Pole

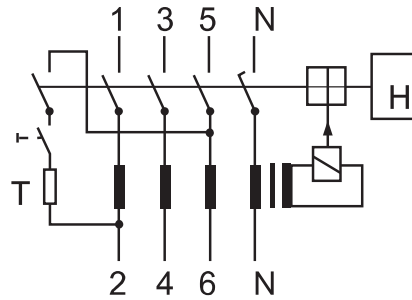

Range



Double Pole
RCCB



Four Pole
RCCB




Test Switch



Contact position flag indicator

Description

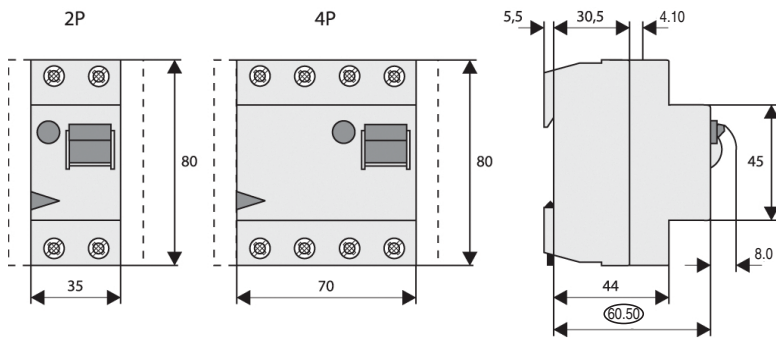

Electrical

Rated voltage	230 / 400V; 50 Hz
Sensitivity/Rated Leakage tripping current	30, 100, 300 mA
Rated Conditional short circuit strength	10kA with 63 A gG back-up fuse 10kA with 80 A gG
Maximum back-up fuse for short circuit protection	63 A gG 80 A gG
Maximum back-up fuse for overload protection	25 A gG 40 A gG 50 A gG
Endurance	electrical mechanical
	> 4,000 operations



Cable Termination upto 35mm² Cable



3 Position Mounting Clip
Permits installation and removal without removing busbar.



Residual Current Protection Unit

- Add-on residual current unit
- Line voltage-independent tripping
- By combining this device with a miniature circuit breaker a top-quality RCBO unit (combined RCD/MCB device) is formed.
- Rated current 16 and 63 A
- Permits combinations with a variety of characteristics thanks to the different rated currents and characteristics of the miniature circuit breakers which can be connected
- Comprehensive range of accessories suitable for subsequent installation onto PLS.
- The test key "T" must be pressed every 6 month. The system operator must be informed of this obligation and his responsibility in a way that can be proven (self-adhesive RCD-label enclosed). The test intervall of 6 month is valid for residential and similar applications. Under all other conditions (e.g. damply or dusty environments), it's recommended to test in shorter intervalls (e.g. monthly).
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement (RE), or proper checking of the earth conductor condition redundant, which must be performed separately.
- **Type - A** : Protect against special forms of residual pulsating DC which have not been smoothed.
- **Type - G** : High reliability against unwanted tripping. Compulsory for any circuit where personal injury or damage to property may occur in case of unwanted tripping (ÖVE-EN1, Part1, §12.14).
- **Type - S** : Selective residual current device, either sensitive to AC, type -S, or sensitive to pulsating DC, type -S/A, for protection against special forms of residual pulsating DC which have not been smoothed. Compulsory for systems with surge arresters downstream of the RCD (ÖVE-EN1, Part 1, §12.15).



Accessories :


Cover cap for draw-out connection bar

Slotted one-way cheese head screw

Accessories (on PLS.) :

Auxiliary switch for subsequent installation	included
Tripping signal contact for subsequent installation	ZP-IHK
	ZP-WHK
Remote control and automatic switching device	Z-FW/LP
Shunt trip release	ZP-ASA..
Undervoltage release	Z-USA..
Compact enclosure	KLV-TC-2
	KLV-TC-4
Additional terminal 35mm2	Z-HA-EK/35
Switching interlock	IS/SPE-1TE


Connection Diagrams

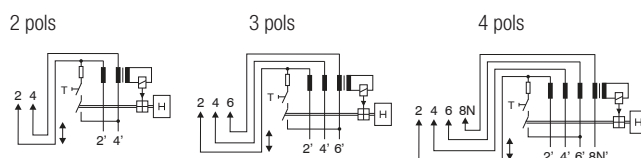

Technical Data

Electrical		Mechanical	
Design according to	IEC/EN 61009	Frame-size	45 mm
Current test marks as printed onto the device		Device height	90 mm
Tripping	instantaneous 250A (8/20 μ s), surge current-proof	Device width	70 mm (2p), 107.5 mm (3p), 125 mm (4p)
	Type G 10 ms delay 3kA (8/20 μ s), surge current-proof	Mounting	fix mounted onto PLS.
	Type S 40 ms delay 6kA - with selective disconnecting function]	Degree of protection installed device	IP20
Rated voltage U_n	230/400 V AC	Fastening screw	M 2.5 (slotted one-way cheese head screw;
Operational voltage range	196 - 440 V	Screw head breaking torque	> 0.6 Nm
Rated frequency	50 Hz	Upper and lower terminals	lift terminals
Use at 16 ^{2/3} Hz	Recesses time between the single switchings increases to 88 s, I_n max. 63A	Terminal screws	M 5 (combined Philips/standard head screws according to DIN7962-Z2, Pozidrive)
Use at 400 Hz	I_n max. 40 A	Terminal protection	finger and hand touch safe, BGV A3, ÖVE-EN 6
Rated current I_n	≤ 40 A, ≤ 63 A	Terminal capacity	
Rated tripping current $I_{\Delta n}$	30, 100, 300mA	Rigid conductors	1 x (1 - 25) mm ²
Rated non-tripping current $I_{\Delta no}$	0.5 $I_{\Delta n}$	Flexible conductors (with wire end sleeve)	1 x (0.75 - 16) mm ²
Sensitivity	AC and pulsating DC	Busbar thickness	0.8 - 2 mm
Service short circuit breaking capacity I_{cs}	same as connected PLS. (7.5 kA)	Permitted ambient temperature range	-25°C to +40°C
Rated breaking capacity I_{cn}	same as connected PLS. (10 kA)	Resistance to climatic conditions	acc. to IEC/EN 60068-2 (25..55°C/90..95% relative humidity)
Rated fault breaking capacity $I_{\Delta m}$	6 kA ($U_n = 230V$) 3 kA ($U_n = 400V$)	Rated fault breaking capacity $I_{\Delta m}$	6 kA ($U_n = 230V$) 3 kA ($U_n = 400V$)

Connection Diagrams

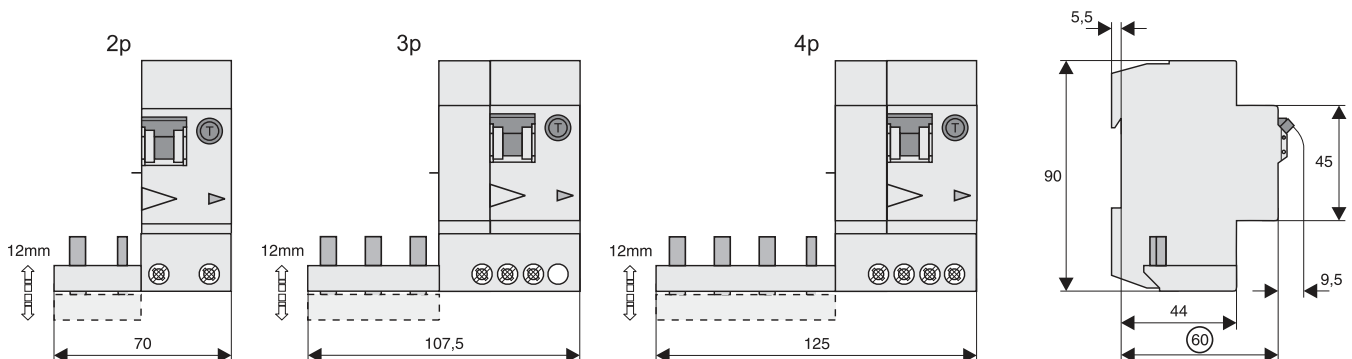



Combined RCD/MCB Devices, 1+N-pole

- Combined RCD/MCB device
- Line voltage-independent tripping
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Guide for secure terminal connection
- Switching toggle (MCB component) in colour designating the rated current
- Contact position indicator red - green
- Comprehensive range of accessories suitable for subsequent installation
- The test key "T" must be pressed every 6 month. The system operator must be informed of this obligation and his responsibility in a way that can be proven (self-adhesive RCD-label enclosed). The test intervall of 6 month is valid for residential and similar applications. Under all other conditions (e.g. damply or dusty environments), it's recommended to test in shorter intervalls (e.g. monthly).
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement (RE), or proper checking of the earth conductor condition redundant, which must be performed separately.
- **Type -A** : Protects against special forms of residual pulsating DC which have have not been smoothed
- **Type -G** : 10 ms time delay in order to avoid unwanted tripping (e.g. during thunderstorms).

Compulsory in Austria for any circuit where personal injury or damage to property may occur in case of unwanted tripping (§12.1.6 ÖVE/ÖNORM E 8001-1).




Accessories:

Auxiliary switch for subsequent installation	ZP-IHK
	ZP-WHK
Tripping signal switch for subsequent installation	ZP-NHK
Shunt trip release	ZP-ASA/..
Tripping module	Z-KAM
Terminal cover cap	KLV-TC-2
Additional terminal 35mm ²	Z-HA-EK/35
Switching interlock	IS/SPE-1TE

Connection Diagrams


1+N pols



Technical Data

Electrical		Mechanical	
Design according to	IEC/EN 61009	Frame size	45 mm
Current test marks as printed onto the device		Device height	80 mm
Tripping line voltage-independent	instantaneous 250A (8/20 μ s) surge current-proof;	Device width	35 mm (2MU)
Type G	10 ms delay 3kA (8/20 μ s) surge current-proof	Mounting	3-position DIN rail clip, permits removal from existing busbar system
Rated voltage U_e	230 V; 50 Hz	Upper and lower terminals	open mouthed/lift terminals
Operational voltage range	196-253 V	Terminal protection	finger and hand touch safe, BGV A3, ÖVE-EN 6
Rated tripping current $I_{\Delta n}$	30, 100, 300 mA	Terminal capacity	1 - 25 mm ²
Rated non-tripping current $I_{\Delta no}$	0.5 $I_{\Delta n}$	Busbar thickness	0.8 - 2 mm
Rated insulation voltage U_i	440 VAC	Degree of protection switch	IP20
Sensitivity	AC and pulsating DC	Degree of protection, built-in	IP40
Selectivity class	3	Tripping temperature	-25°C to +40°C
Rated breaking capacity	10 kA	Storage- and transport temperature	-35°C to +60°C
Rated current	16 - 40 A	Resistance to climatic conditions	acc. to IEC/EN 61009
Rated peak withstand voltage U_{imp}	4 kV (1.2/50 μ s)	Rated peak withstand voltage U_{imp}	4 kV (1.2/50 μ s)
Characteristic	B, C	Characteristic	B, C
Maximum back-up fuse (short circuit)	100 A gL (>10 kA)	Maximum back-up fuse (short circuit)	100 A gL (>10 kA)
Endurance electrical comp.	\geq 4,000 operating cycles	Endurance electrical comp.	\geq 4,000 operating cycles
Mechanical comp.	\geq 20,000 operating cycles	Mechanical comp.	\geq 20,000 operating cycles

Connection Diagrams

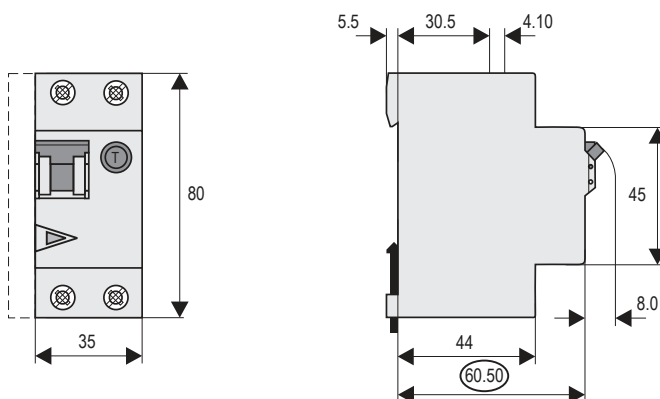




Load Capacity -1N/

Effect of ambient temperature (MCB component)

I _n [A]	Ambient temperature T [°C]								
	-25	-20	-10	0	10	20	30	35	40
2	2.5	2.4	2.3	2.2	2.2	2.1	2.0	2.0	1.9
4	4.9	4.8	4.7	4.5	4.3	4.2	4.0	3.9	3.9
5	6.2	6.0	5.8	5.6	5.4	5.2	5.0	4.9	4.8
6	7.4	7.2	7.0	6.7	6.5	6.3	6.0	5.9	5.8
8	9.9	9.6	9.3	9.0	8.7	8.4	8.0	7.9	7.7
10	12	12	12	11	11	10	10	9.9	9.7
12	15	14	14	13	13	13	12	12	12
13	16	16	15	15	14	14	13	13	13
15	19	18	17	17	16	16	15	15	15
16	20	19	19	18	17	17	16	16	15
20	25	24	23	22	22	21	20	20	19
25	31	30	29	28	27	26	25	25	24
32	40	38	37	36	35	33	32	32	31
40	49	48	47	45	43	42	40	39	39

Tripping Characteristic -1N/, Characteristics B & C

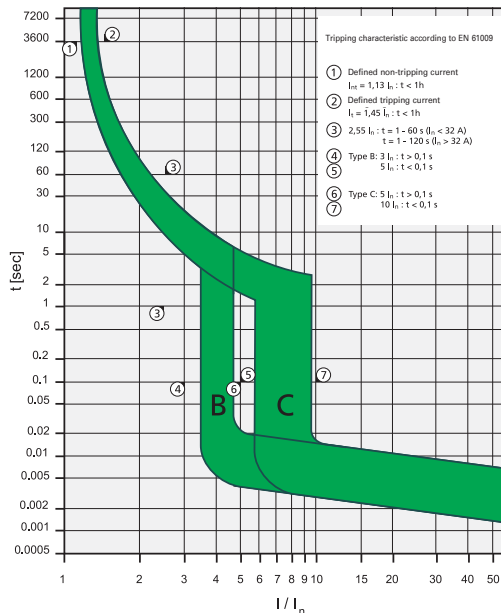

Short Circuit Selectivity -1N/ towards DII-DIV fuse link

In case of short circuit, there is selectivity between the combined RCD/MCB devices 1N/ and the upstream fuses up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{sc} under I_s, only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

*) basically in accordance with EN 60898-1 D.5.2.b

Short circuit selectivity characteristic B towards fuse link DII-DIV *)

Rating	DII-DIV gL/gG									
I _n [A]	10	16	20	25	35	50	63	80	100	
2	<0.5 ¹⁾	<0.5 ¹⁾	2.2	8.5	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
4	<0.5 ¹⁾	<0.5 ¹⁾	0.7	1.2	3.7	10.0	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
6		<0.5 ¹⁾	0.7	1.0	2.9	6.9	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
8		<0.5 ¹⁾	0.6	1.0	2.4	5.1	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
10			0.6	0.9	1.9	3.3	7.0	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
13			0.5	0.7	1.6	2.8	5.7	9.0	10.0 ²⁾	10.0 ²⁾
16				0.7	1.4	2.4	4.4	7.0	10.0 ²⁾	10.0 ²⁾
20					1.3	2.2	4.0	6.3	10.0 ²⁾	10.0 ²⁾
25					1.3	2.1	3.8	5.8	10.0 ²⁾	10.0 ²⁾
32						2.0	3.5	5.2	9.5	10.0 ²⁾
40							3.1	4.5	8.1	10.0 ²⁾

Short circuit selectivity characteristic C towards fuse link DII-DIV *)

Rating	DII-DIV gL/gG									
I _n [A]	10	16	20	25	35	50	63	80	100	
2	<0.5 ¹⁾	<0.5 ¹⁾	1.7	6.0	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
4	<0.5 ¹⁾	<0.5 ¹⁾	0.7	1.3	4.2	8.5	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
5	<0.5 ¹⁾	<0.5 ¹⁾	0.6	1.1	3.6	7.0	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
6		<0.5 ¹⁾	0.6	1.0	2.9	5.8	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
8		<0.5 ¹⁾	<0.5	0.9	2.5	4.8	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
10			<0.5	0.7	1.5	2.6	5.3	9.0	10.0 ²⁾	10.0 ²⁾
13					1.4	2.3	4.6	7.6	10.0 ²⁾	10.0 ²⁾
16					1.2	1.8	3.4	5.5	10.0 ²⁾	10.0 ²⁾
20					1.2	1.7	3.1	5.0	10.0 ²⁾	10.0 ²⁾
25						1.6	2.9	4.6	10.0 ²⁾	10.0 ²⁾
32							2.3	3.4	7.7	10.0 ²⁾
40								2.9	6.2	10.0 ²⁾

¹⁾ Selectivity limit current I_s under 0.5 kA

²⁾ Selectivity limit current I_s = rated breaking capacity I_{cn} of the RCD/MCB device

Darker areas: no selectivity



Protective Devices

Short Circuit Selectivity-1N/ towards D01-D03 fuse link

In case of short circuit, there is selectivity between the combined RCD/MCB devices 1N/ and the upstream fuses up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{sk} under I_s , only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

*) basically in accordance with EN 60898-1 D.5.2.b

Short circuit selectivity characteristic B towards fuse link D01-D03 *)

Rating	D01-D03 gL/gG									
I_n [A]	10	16	20	25	35	50	63	80	100	100
2	<0.5 ¹⁾	0.7	1.6	3.3	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
4	<0.5 ¹⁾	<0.5 ¹⁾	0.6	0.9	2.9	10.0	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
6		<0.5 ¹⁾	0.5	0.8	2.4	8.2	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
8			0.6	0.8	2.0	6.0	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
10			0.5	0.8	1.6	3.7	6.0	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
13			0.6	0.7	1.4	3.0	4.7	9.0	10.0 ²⁾	10.0 ²⁾
16				0.6	1.2	2.6	3.9	7.0	10.0 ²⁾	10.0 ²⁾
20					1.2	2.5	3.6	6.2	10.0 ²⁾	10.0 ²⁾
25					1.2	2.3	3.3	5.7	10.0 ²⁾	10.0 ²⁾
32						2.3	3.1	5.1	10.0 ²⁾	10.0 ²⁾
40							2.8	4.5	9.5	10.0 ²⁾

Short circuit selectivity characteristic C towards fuse link D01-D03 *)

Rating	D01-D03 gL/gG									
I_n [A]	10	16	20	25	35	50	63	80	100	100
2	<0.5 ¹⁾	0.5	0.5	2.4	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
4	<0.5 ¹⁾	<0.5 ¹⁾	<0.5 ¹⁾	0.9	3.4	9.5	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
5	<0.5 ¹⁾	<0.5 ¹⁾	<0.5 ¹⁾	0.9	2.9	8.0	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
6		<0.5 ¹⁾	<0.5 ¹⁾	0.8	2.3	6.5	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
8			<0.5	0.7	2.1	5.5	9.5	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾
10			<0.5	0.6	1.3	2.9	4.5	8.9	10.0 ²⁾	10.0 ²⁾
13					1.2	2.5	3.9	7.6	10.0 ²⁾	10.0 ²⁾
16					1.0	2.1	3.0	5.5	10.0 ²⁾	10.0 ²⁾
20					1.0	2.0	2.7	5.0	10.0 ²⁾	10.0 ²⁾
25						1.9	2.6	4.5	10.0 ²⁾	10.0 ²⁾
32							2.1	3.4	10.0 ²⁾	10.0 ²⁾
40								3.0	8.7	10.0 ²⁾

Short Circuit Selectivity -1N/ towards NH-00 fuse link

In case of short circuit, there is selectivity between the combined RCD/MCB devices 1N/ and the upstream fuses up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{sk} under I_s , only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

*) basically in accordance with EN 60898-1 D.5.2.b

Short circuit selectivity characteristic B towards fuse link NH-00 *)

Rating	NH-00 gL/gG												
I_n [A]	16	20	25	32	35	40	50	63	80	100	125	160	
2	<0.5 ¹⁾	1.1	3.6	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	
4	<0.5 ¹⁾	0.5	0.9	1.6	2.8	4.4	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	
6	<0.5 ¹⁾	0.5	0.8	1.4	2.2	3.3	7.0	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	
8	<0.5 ¹⁾	<0.5 ¹⁾	0.7	1.0	1.9	2.8	5.3	7.8	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	
10		<0.5 ¹⁾	0.7	0.9	1.5	2.1	3.4	4.3	7.3	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	
13		<0.5 ¹⁾	0.6	0.8	1.4	1.8	2.8	3.6	5.7	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	
16			0.6	0.7	1.2	1.5	2.4	3.0	4.5	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	
20				0.7	1.1	1.5	2.2	2.8	4.2	9.2	10.0 ²⁾	10.0 ²⁾	
25				0.7	1.1	1.4	2.1	2.6	4.0	8.2	10.0 ²⁾	10.0 ²⁾	
32					1.0	1.4	2.0	2.5	3.7	7.1	10.0 ²⁾	10.0 ²⁾	
40							2.3	3.4	6.2	8.8	10.0 ²⁾	10.0 ²⁾	


Short circuit selectivity characteristic C towards fuse link NH-00 *)

Rating	NH-00 gL/gG												
I_n [A]	16	20	25	32	35	40	50	63	80	100	125	160	
2	<0.5 ¹⁾	0.6	2.6	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	
4	<0.5 ¹⁾	<0.5 ¹⁾	0.9	1.8	3.2	4.8	8.7	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	
5	<0.5 ¹⁾	<0.5 ¹⁾	0.8	1.6	2.7	4.1	7.2	9.7	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	
6	<0.5 ¹⁾	<0.5 ¹⁾	0.7	1.3	2.2	3.3	5.9	8.0	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	
8	<0.5 ¹⁾	<0.5 ¹⁾	0.6	1.1	1.9	2.8	5.0	6.7	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	
10			0.5	0.8	1.2	1.7	2.7	3.4	5.5	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	
13					1.1	1.5	2.3	2.9	4.7	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	
16					1.0	1.3	1.8	2.3	3.7	8.7	10.0 ²⁾	10.0 ²⁾	
20					0.9	1.1	1.7	2.2	3.4	8.0	10.0 ²⁾	10.0 ²⁾	
25						1.6	2.1	3.2	7.2	10.0 ²⁾	10.0 ²⁾	10.0 ²⁾	
32							1.7	2.6	5.3	9.0	10.0 ²⁾	10.0 ²⁾	
40								2.4	4.5	7.5	10.0 ²⁾	10.0 ²⁾	

¹⁾ Selectivity limit current I_s under 0.5 kA

²⁾ Selectivity limit current I_s = rated breaking capacity I_{cn} of the RCD/MCB device

Darker areas: no selectivity



Distribution Board

Wide Range-Varied Application



Wide Range-Varied Application

Osäfe DB's are design to meet the requirement of today's Building Industry for domestic, commercial & Industrial application.

Osäfe DB's are aesthetically designed it cover all functionality & Safety norms to meets high standard of quality.

Our Distribution boards are manufactured with high precision & High Quality CRCA Steel Sheets. Its finest process of Phosphatizing ensure anti-rust conditioning with better finish.

Osäfe is available in elegant white colour. (RAL9003) Osäfe Distribution boards are as per IP 43 Protection with metal door.

Knockout for SPN & TPN DB's (26mm & 32mm).

Detachable Plate on Top and Bottom in case of higher conduits.



Range






Shrouded Neutral Bar



Detachable Pan Assembly

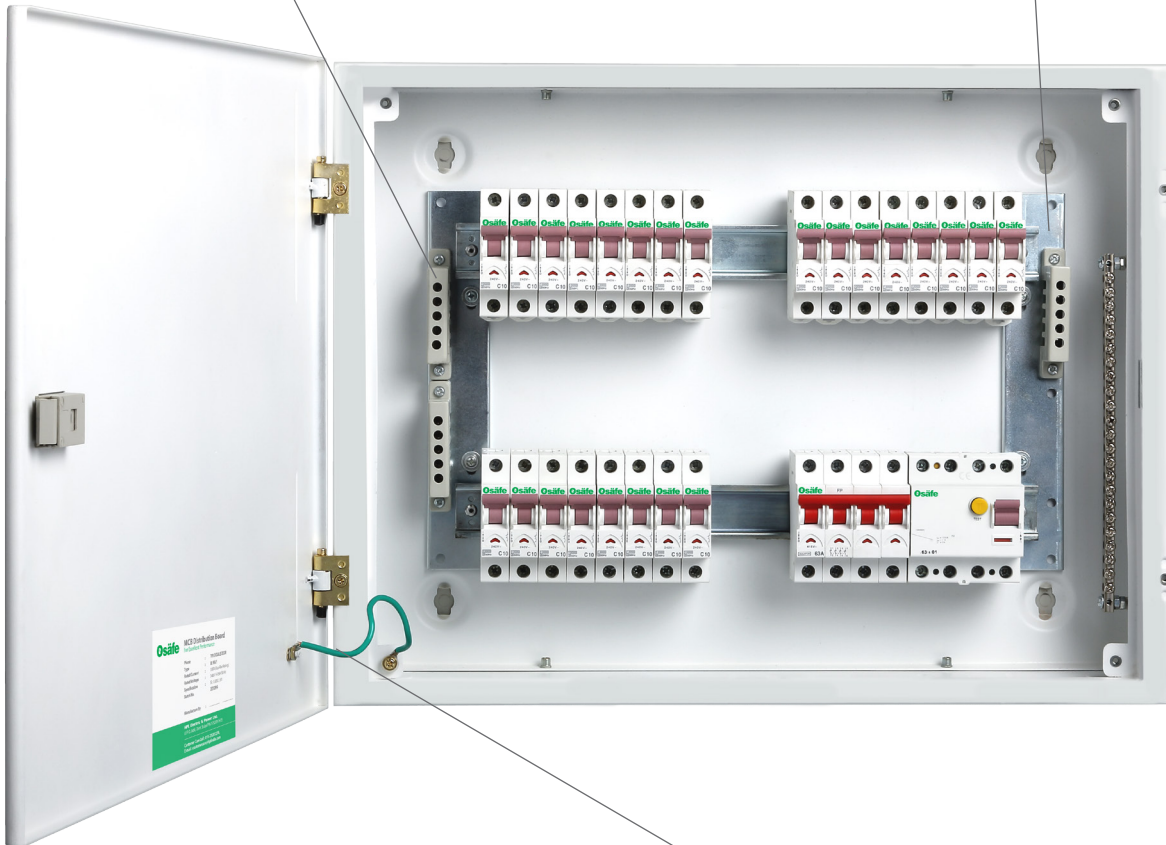


Door Earthing

Major Features

- Color white (RAL9003)
- As per IS 8623
- Cement Guard
- Anti Insertion Marker
- Shrouded neutral bar & insulated copper bus bar.
- Door Earthing
- Suitable for flash & Surface Mounting.
- As per IP-43 Protection



Distribution Board

Wide Range-Varied Application

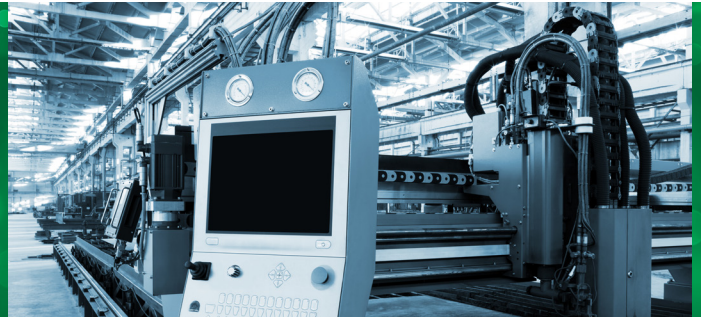

SPN DB Sailable Features

- Suitable for flush mounting & surface mounting.
- Insulated Bus bar rated upto 200A.
- Safe Neutral link covered with FR Housing
- Door Earthing
- PAN Assembly for ease of installation.
- Special care of Cable Management
- Sunpack sheet
- Mat finish with new look & New Innovative DB

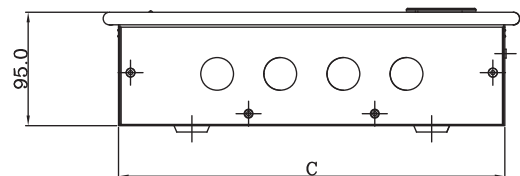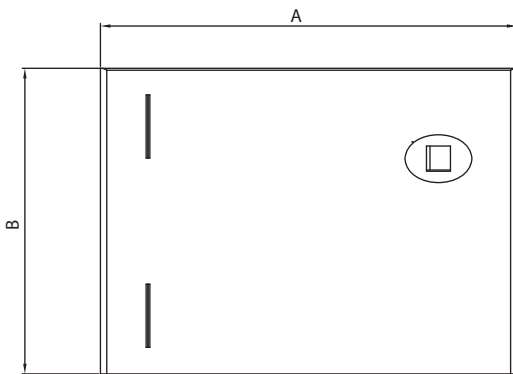

Ways	A	B	C
4	220.00	226.00	196.00
6	255.00	226.00	231.00
8	290.00	226.00	266.00
10	325.00	226.00	301.00
12	360.00	226.00	336.00
14	395.00	226.00	371.00
16	430.00	226.00	406.00



TPN DB Slient Features

- Suitable for flush mounting & surface mounting.
- Insulated Bus bar rated upto 200A.
- Safe Neutral link covered with FR Housing
- Door Earthing
- Equipped with wire set
- Provision for FPMCB/Isolator & FP RCCB as Incommer
- PAN Assembly for ease of installation.
- Special care of Cable Management
- Sunpack sheet
- Mat finish with new look & New Innovative DB



Standard Accessories

- Wire Set
- Insulated bus bar
- Insulated neutral bars & Earth Bar
- Blanking Plates
- Wire Management System
- Circuits identification Labels

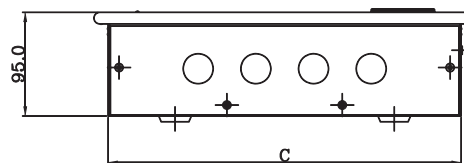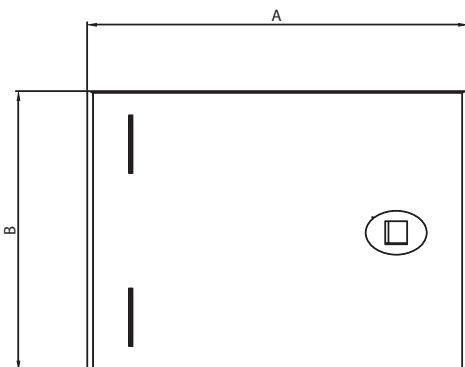

Ways	A	B	C
4	438.00	400.00	412.00
6	473.00	400.00	447.00
8	543.00	400.00	517.00
12	688.00	400.00	657.00

HPL Global Presence



HPL Electric & Power Ltd

Corp. Office : Windsor Business Park, B-1D, Sector-10, Noida, U.P. - 201301, INDIA

Tel.: +91-120-4656300, *Fax:* +91-120-4656333

Registered Office : 1/20, Asaf Ali Road, New Delhi - 110 002, INDIA.

E-mail : gsm@hplindia.com

www.hplindia.com