



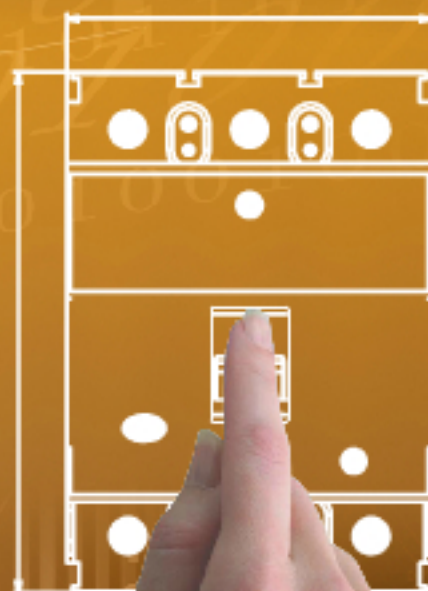

The Power of Technology

Switch on Your Electrical Protection

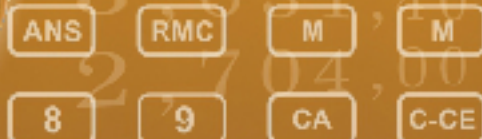

HPL MCCB TAB™ 160

Features

- Conforms to IEC 60947-2 / IS 13947-2.
- Available in rated current from 20A-160A and breaking capacity 10 to 36kA in TP & FP version with neutral fully protected for FP.
- Adjustable Thermal release (80-100%) offers close protection from changing load.
- Line load reversibility .
- Low let through energy.
- Quick-make, Quick-break & Trip Free mechanism.
- Very Compact in Size & Uniform Door cut-out in line with MCB.
- Wide range of internal and external accessories.
- Enhanced life.
- ROHS Compliant.
- Also available for DC application.



HPL INDIA LTD.

1/21, Asaf Ali Road, New Delhi - 110002
Ph.: 23234411, 23234811 Fax : 011-23232639
e-mail : hpl@hplindia.com

www.hplindia.com